

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 001 582 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
17.05.2000 Bulletin 2000/20

(51) Int. Cl.<sup>7</sup>: **H04L 29/06, H04L 12/56**

(21) Application number: **99309035.6**

(22) Date of filing: **12.11.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Neogi, Raja**  
**Portland, Oregon 97229 (US)**


(74) Representative:  
**Molyneaux, Martyn William**  
**Langner Parry**  
**52-54 High Holborn**  
**London WC1V 6RR (GB)**

(30) Priority: **13.11.1998 US 191929**

(71) Applicant: **TEKTRONIX, INC.**  
**Wilsonville, Oregon 97070-1000 (US)**

(54) **System for network transcoding of multimedia data flow**

(57) A service provider node has an active network daemon running on it. Users control an adaptive pipeline via the active network capability of the service provider node by sending coded instructions to the service provider node. An adaptive pipeline is constructed within the service provider node according to control parameters contained in the coded instructions sent to it by a user. The adaptive pipeline includes a decode and an encode stage with zero or more intermediate filtering stages. The number and type of intermediate stages is determined by the values of the specified flow parameters.

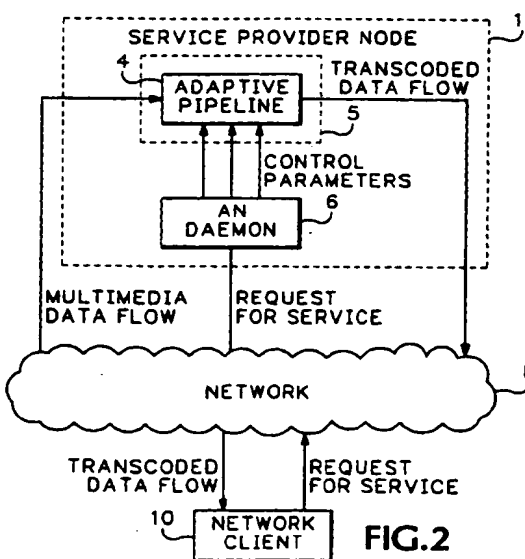

**FIG.2**

EP 1 001 582 A2

## Description

### Background of the Invention

[0001] The present invention relates in general to transcoding, and more particularly to network transcoding of multimedia data flow.

[0002] Distributed multimedia applications require communications support mechanisms with multiple clients on a network. Referring to Fig. 1, networking capability of a network node (a computer residing on a network) is divided into several layers that interface with each other. This is called the network stack. Starting from the bottom of the network stack, the physical network interface is responsible for receiving the electronic signals that come across the network wire. Moving up the stack the network signals are decoded further and passed to the next stack until the application layer is reached. It is this layer where the network traffic is interpreted in such a way that a response can be communicated to network clients to satisfy the ultimate service request by that client, such as a request for particular multimedia data flow.

[0003] Such network traffic needs to be delivered to end-systems, networks and end-users in a form that they can handle while satisfying the constraints imposed by the application. Quality of Service (QOS) mechanisms that allow full quality multimedia data play-out on high-performance stations, while at the same time providing appropriately filtered lower quality play-out, perhaps in a different coding format, at other end systems is called transcoding. However, current transcoders cannot scale, cannot adapt and are not flexible.

[0004] What is desired is a system for network transcoding of multimedia data flow wherein users can program a transcoding resource across the network and have a custom transcoder, so to speak, that scales, is adaptable and flexible.

### Summary of the Invention

[0005] In accordance with the illustrated preferred embodiment of the invention, a service provider node has an active network daemon running on it. Users control an adaptive pipeline via the active network capability of the service provider node by sending coded instructions to the service provider node. After intercepting a network client request for transcoding, an adaptive pipeline is constructed within the service provider node according to control parameters contained in the coded instructions sent to it by a user. The adaptive pipeline includes a decode and an encode stage with zero or more intermediate filtering stages. The number and type of intermediate stages is determined by the values of the specified flow parameters. The multimedia data flow requested by the network client is then processed through the adaptive pipeline and the resulting transcoded multimedia data flow is sent to the network

client that requested it.

[0006] The objects, advantages, and other novel features of the present invention are apparent from the following detailed description when read in conjunction with the appended claims and attached drawing.

### Brief Description of the Drawing

[0007]

Fig. 1 is a block diagram of the layers of a network stack.

Fig. 2 is a block diagram of a system for network transcoding according to the present invention.

Fig. 3 is a block diagram of an adaptive pipeline according to the present invention.

### Description of the Preferred Embodiment

[0008] Referring to Fig. 1, the present invention operates at the application layer of the network stack, and therefore no change is required in current network protocols such as IP (Internet Protocol), and standardized packet format and addressing schemes are used.

[0009] Referring to Fig. 2, a network client 10 launches a request for service over a network 8. A service provider node 11 residing on the network 8 has a program running called an active network (AN) daemon 6. The AN daemon 6 provides a programmable open node so that network users may deploy programs dynamically into node engines. The service provider 11 intercepts the request and the AN daemon 6 forks a child process 5 corresponding to the service requested from a plurality of services that may be available. According to the present invention the service that is requested is transcoding. The AN daemon 6 then parses the request for service and loads specific control parameters specified in the request for service into a data structure. The control parameters are specified by a network user and include, but are not limited to:

1. Command Type (e.g. Connection request)
2. Ports (channel identifications)
3. Media Type
4. Bit-Rate
5. Frame Rate
6. Resolution
7. End-to-End Latency
8. Interlace

9. Signature
10. Loss Percentage
11. Content Identification
12. Code Type
13. Filter
14. Filter Parameter
15. Prediction
16. Hostname

[0010] The relationship between a parent and child process is such that the parent process (AN daemon 6) and the child process 5 are running concurrently within the network node 11 and therefore may communicate with each other through parameters.

[0011] The child process 5 hosts an adaptive pipeline 4 in order to provide transcoding service. Referring to Fig. 3, an adaptive pipeline 4 is a set of modular components, each component implementing one transformation to a data stream. The data stream in the preferred embodiment is multimedia data flow being sent to the service provider node 11, such as Moving Picture Experts Group standards 1-4 (MPEG-1, MPEG-2, MPEG-4), Joint Photographic Experts Group (JPEG), H.263, H.261, but is not limited to those standards. The head end stage of the pipeline 4 is a decoder engine 20 for the particular standard requested for transcoding, while the tail end 24 is an encoder engine 26 for the particular standard requested to be the result of the transcoding. The intermediate stages 22 are those that allow adjusting of the quality of baseband multimedia data flow in order to transcode the data flow. These include, but are not limited to: horizontal filtering, vertical filtering, mosquito filtering and adaptive interpolation. Buffer pools 12, 14, 16, 18 fulfill the memory requirements of the particular stages of the adaptive pipeline 4.

[0012] Referring to Fig. 2, The AN daemon 6 passes the control parameters to the adaptive pipeline 4 by passing the data structure containing the control parameters to the child process 5 hosting the adaptive pipeline 4. Referring to Fig. 3 the adaptive pipeline is configured according to the control parameters. The child process calls action functions to perform the decode 20, filter 22 or encode 24 stage of the adaptive pipeline 4 and these in turn select an appropriate function to transcode the multimedia data flow requested by the network client 10 according to the encode or decode code type and the other configurations specified by the control parameters. This allows the pipeline 4 itself and individual stages of the pipeline to be configurable across the network by users specifying values of flow parameters.

[0013] The intermediate stage(s) 22 of the pipeline 4 however, are optional and there could be more than one intermediate stage. The intermediate stage(s) 22 are a function of the amount of filtering desired, which is specified in the flow parameters mentioned above. On the simple side, an MPEG-2 to H.263 transcoding requires at least horizontal and vertical filtering in the intermediate stages 22. On the more complex side, the filtering could be so exhaustive that certain combinations would not fit in a stage, and therefore combinations are split into multiple intermediate stages 22. For example, if adaptive interpolation is a type of filtering requested, and horizontal/vertical filtering are still required, the choice is to add another stage. Which combinations fit into a stage and in what order is active-node intelligence captured in tables. If a user requests a large amount of filtering it results in multistage filtering, and therefore more end-to-end latency. This is not desired for video conferencing but is perhaps acceptable for just browsing. For real-time interaction, like in video conferencing, it is desirable to request an amount of filtering that requires either just one, or no stage at all. The significance of the one filtering stage is that it can serve as a synchronization port as well.


[0014] The Node Operating System (NodeOS) of the service provider node 11 according to the preferred embodiment is an off-the-shelf real-time operating system REACT, an extension of the IRIX operating system provided by SGI, Inc., but any other real-time NodeOS may be used which has the following general characteristics. REACT NodeOS provides interface for activity/thread mapping and support for real-time frame-based scheduling and related context switching. A nominal period of a few milliseconds is set, with programming for phantom frame injection. This results in elastic behavior of the frame boundary, which is a desirable property of soft real-time applications, especially when the same set of resources are being shared by multiple sessions. This particular NodeOS provides limited monitoring facilities that the adaptive pipeline 4 may use for adaptive behavior. Overrun (crossing stipulated frame boundary) condition is the most common monitor used. NodeOS also provides system calls to administer resource usage. This input is used by an admission-control engine to limit new channel buildup.

[0015] Referring to Fig. 2, the transcoded data flow resulting from the process of the adaptive pipeline 4 is then sent over the network 8 to the network client 10 that requested it. The data is consistent with the format requested by the network client 10 according to the flow parameters in the request for service.

[0016] Thus, the present invention provides a system for network transcoding of multimedia data flow wherein users program a transcoding resource across the network and have a custom transcoder, so to speak, that scales, is adaptable and flexible.

## Claims


1. A method for network transcoding of multimedia data flow comprising the steps of:
  - receiving from a network client by an active network daemon a request for service containing flow parameters;
  - decoding multimedia data flow requested by the request for service in a way determined by the flow parameters in the request for service;
  - encoding the decoded multimedia data flow in a way determined by the flow parameters in the request for service, thereby producing transcoded multimedia data flow; and
  - transmitting the transcoded multimedia data flow to the network client.
2. A method for network transcoding of multimedia data flow according to claim 1 further comprising, after the decoding step, the step of filtering the decoded multimedia data flow in a way determined by the flow parameters in the request for service, the filtered decoded multimedia dataflow being input to the encoding step.
3. A method for network transcoding of multimedia data flow according to claim 1 or 2 wherein the flow parameters indicate at least one of the following: command type, ports, media type, bit-rate, frame rate, resolution, end-to-end latency, interlace, signature, loss percentage, content identification, code type, filter, filter parameter, prediction, host-name.
4. An apparatus for network transcoding of multimedia data flow comprising:
  - means for receiving from a network client by an active network daemon a request for service containing flow parameters;
  - means for decoding multimedia data flow requested by the request for service in a way determined by the flow parameters in the request for service;
  - means for encoding the decoded multimedia data flow in a way determined by the flow parameters in the request for service, thereby producing transcoded multimedia data flow; and
  - means for transmitting the transcoded multimedia data flow to the network client.
5. An apparatus for network transcoding of multimedia data flow according to claim 4 further comprising means for filtering the decoded multimedia data flow in a way determined by the flow parameters in the request for service, if any filtering is desired as indicated by the flow parameters.
6. An apparatus for network transcoding of multimedia data flow according to claim 4 or 5 wherein the flow parameters indicate at least one of the following: command type, ports, media type, bit-rate, frame rate, resolution, end-to-end latency, interlace, signature, loss percentage, content identification, code type, filter, filter parameter, prediction, host-name.
7. An apparatus for network transcoding of multimedia data flow comprising:
  - a service provider node having an active network daemon capable of receiving a request for service containing flow parameters from network clients;
  - an adaptive pipeline to transcode multimedia data flow in a way determined by the flow parameters in the request for service.
8. An apparatus for network transcoding of multimedia data flow according to claim 7 wherein the adaptive pipeline comprises:
  - a decoder within the service provider node adapted to decode multimedia data flow requested by the request for service in a way determined by the flow parameters in the request for service;
  - a filter coupled to the decoder, adapted to filter multimedia data flow in a way determined by the flow parameters in the request for service, if any filtering is desired as indicated by the flow parameters;
  - an encoder coupled to the filter, adapted to encode the decoded multimedia data flow in a way determined by the flow parameters in the request for service thereby producing transcoded multimedia data flow; and
  - means for transmitting the transcoded multimedia data flow to the network client.
9. An apparatus for network transcoding of multimedia data flow according to claim 7 or 8 wherein the flow parameters indicate at least one of the following: command type, ports, media type, bit-rate, frame rate, resolution, end-to-end latency, interlace, signature, loss percentage, content identification, code type, filter, filter parameter, prediction, host-name.

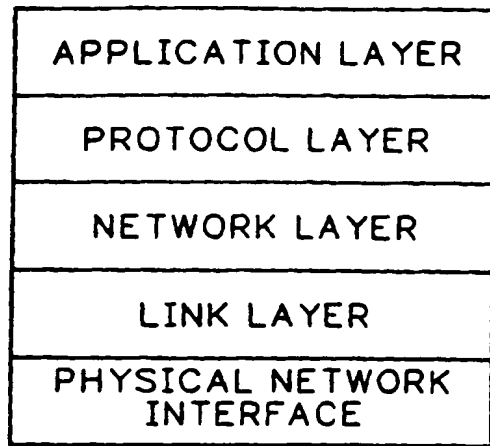

NETWORK STACK

**FIG.1**

(PRIOR ART)

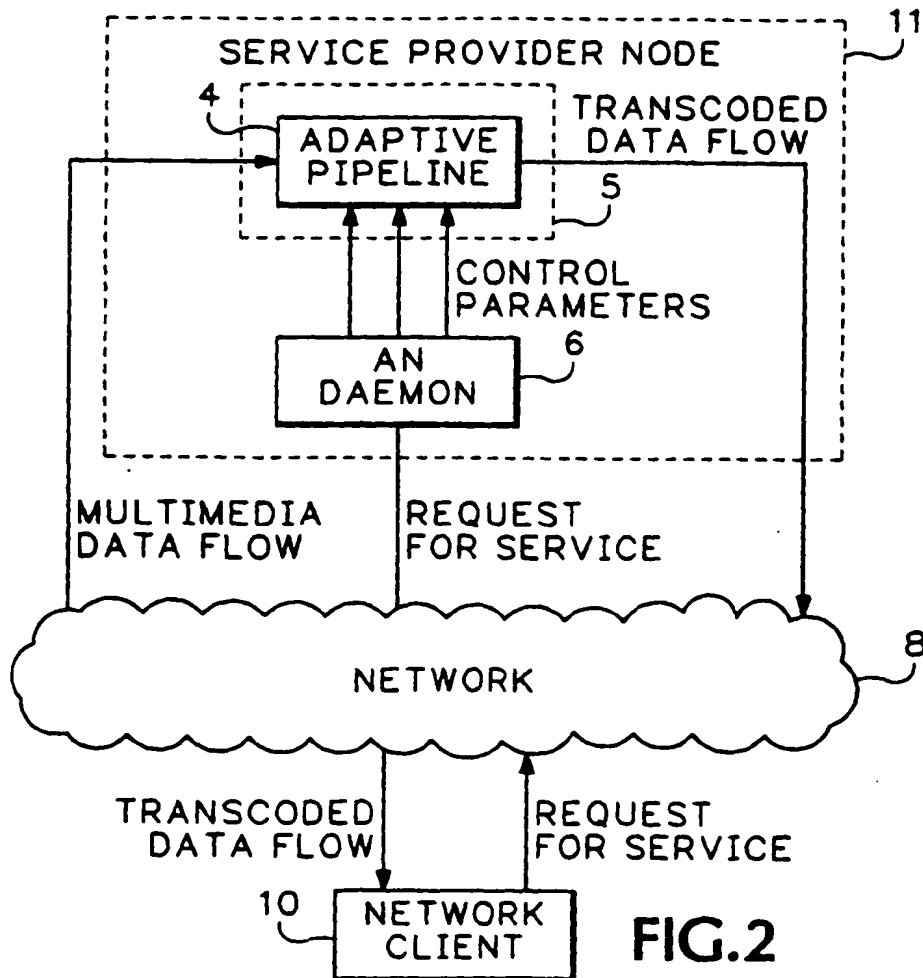

**FIG.2**


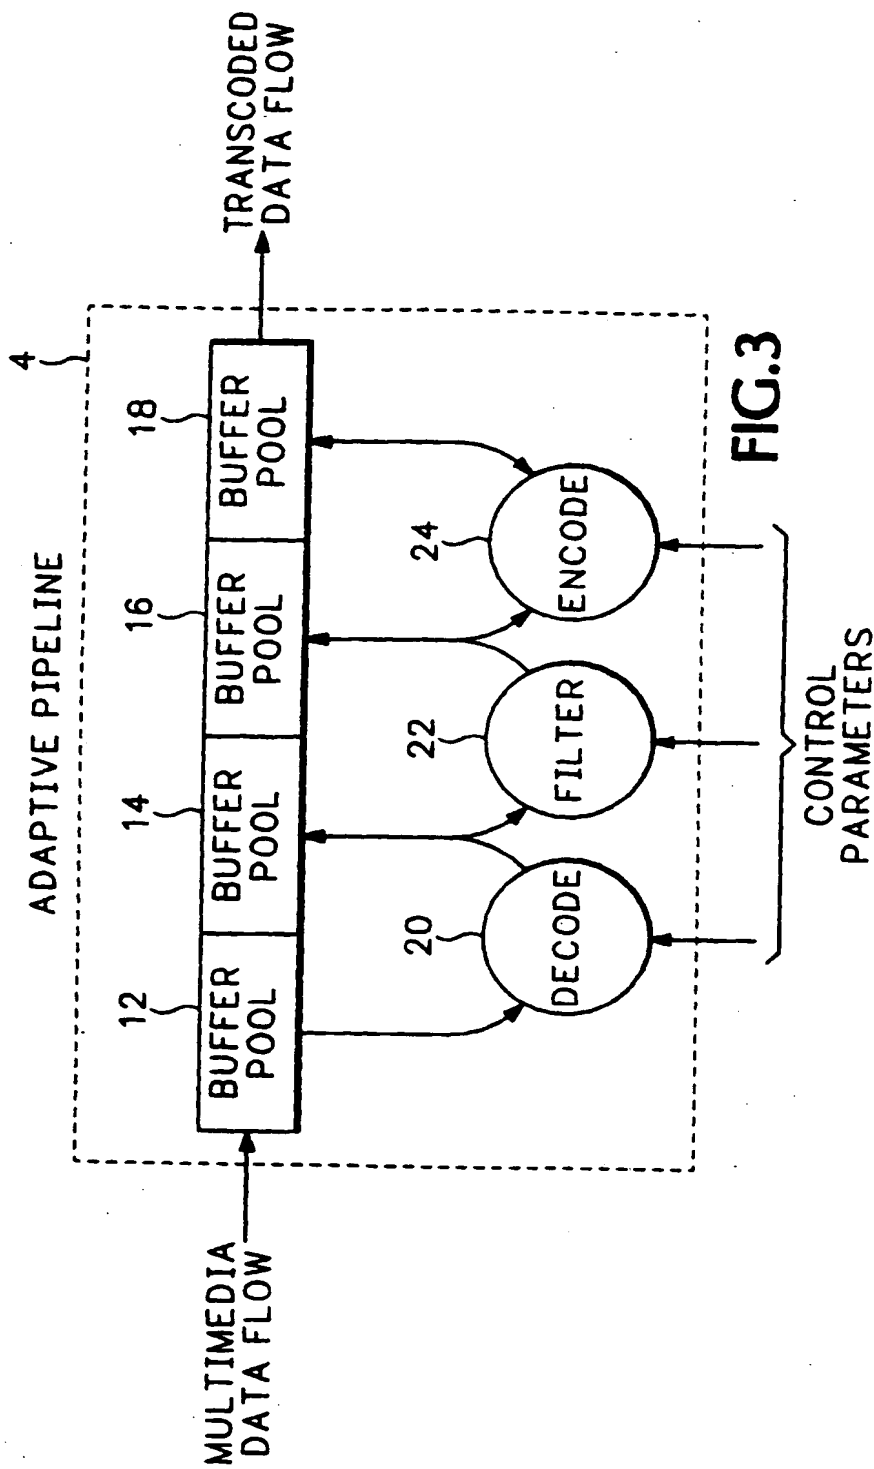


FIG.3



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 001 582 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
15.11.2000 Bulletin 2000/46

(51) Int. Cl.<sup>7</sup>: **H04L 29/06**, H04L 12/64,  
H04L 12/66

(43) Date of publication A2:  
17.05.2000 Bulletin 2000/20

(21) Application number: **99309035.6**

(22) Date of filing: **12.11.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Neogi, Raja**  
**Portland, Oregon 97229 (US)**


(30) Priority: **13.11.1998 US 191929**

(74) Representative:  
**Molyneaux, Martyn William**  
**Langner Parry**  
**52-54 High Holborn**  
**London WC1V 6RR (GB)**

(71) Applicant: **TEKTRONIX, INC.**  
**Wilsonville, Oregon 97070-1000 (US)**

(54) **System for network transcoding of multimedia data flow**

(57) A service provider node has an active network daemon running on it. Users control an adaptive pipeline via the active network capability of the service provider node by sending coded instructions to the service provider node. An adaptive pipeline is constructed within the service provider node according to control parameters contained in the coded instructions sent to it by a user. The adaptive pipeline includes a decode and an encode stage with zero or more intermediate filtering stages. The number and type of intermediate stages is determined by the values of the specified flow parameters.

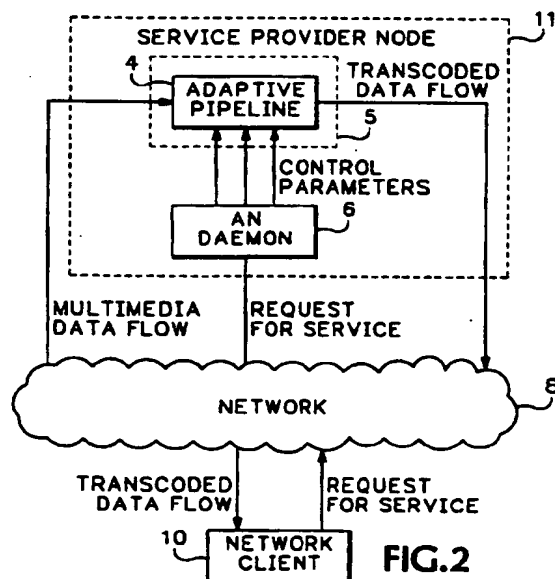

EP 1 001 582 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 9035

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 98 43177 A (INTEL CORP) 1 October 1998 (1998-10-01) * page 3, line 5 - page 5, line 29 * * page 11, line 2 - page 13, line 19 * * page 17, line 27 - page 18, line 6 * * page 19, line 13 - line 27; claims 1-6 *	1-9	H04L29/06 H04L12/64 H04L12/66
A	AMIR ELAN ; MCCANNE STEVEN ; KATZ RANDY : "Active service framework and its application to real-time multimedia transcoding" PROCEEDINGS OF THE 1998 CONFERENCE ON APPLICATIONS, TECHNOLOGIES, ARCHITECTURES, AND PROTOCOLS FOR COMPUTER COMMUNICATION, ACM SIGCOMM'98; VANCOUVER, CANADA , vol. 28, no. 4, 31 August 1998 (1998-08-31) - 4 September 1998 (1998-09-04), pages 178-188, XP002147572 * page 178, right-hand column, line 1 - page 180, left-hand column, line 44 * * page 181, left-hand column, paragraph 2.3.1 - page 182, right-hand column, line 12 * * page 186, right-hand column, paragraph 3.3 *	1,4,7	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> <div>H04L H04Q</div>
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>15 September 2000</b>	Examiner <b>Karavassilis, N</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04031)





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 9035

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>SHARMA ROSEN ; KESHAV S ; WU MICHAEL ; WU LINDA : "Environments for active networks"</p> <p>PROCEEDINGS OF THE 1997 7TH INTERNATIONAL WORKSHOP ON NETWORK AND OPERATING SYSTEM SUPPORT FOR DIGITAL AUDIO AND VIDEO , 19 - 21 May 1997, pages 77-84, XP002147575</p> <p>St.Louis, MO, USA</p> <p>* abstract *</p> <p>* page 78, left-hand column, line 1 - line 24 *</p> <p>* page 78, right-hand column, paragraph 2.1 *</p>	1,4,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>15 September 2000</b>	Examiner <b>Karavassilis, N</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/12 (P0401)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 9035

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-09-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9843177     A	01-10-1998	US     5902846 A	11-05-1999
		AU     6865698 A	20-10-1998
		EP     1012733 A	28-06-2000
<hr/>			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82